

Pogled na krov


Visina srednjeg elementa treba biti predviđena na visini kao što je balkonska ograda (105-120 cm)

Spoljašnja roletna **VELUX SMG**

Fiksni krovni prozor **VELUX GIL** (ugradnja samo u kombinaciji sa krovnim prozorom koji se otvara)

Rešenje je posebno pogodno za kosi krov koji počinje do poda prostorije (bez nadzidka).

1/4



Presek A-A / M10

Detalj D M5

Spoj parne brane u ostatku krova dvostruko lepljivom trakom sa **VELUX BBX** parnom branom i učvršćenje letvom

GGL Visina L













GIL Visina L=92cm

Unutrašnja završna obloga, gips-karton
Krovni prozor sa središnjim otvaranjem **VELUX GGL**


Detalj B M5

Pričvršćivanje prozorskih okvira jedan na drugi bez potrebe za dodatnim konstruktivnim elementom

VELUX proizvodi

-  **GGL**
15°-90°
-  **GIL**
15°-90°
-  **EKW**
15°-90°
-  **ETW**
35°-53°
-  **ETX**
35°-53°
-  **BFX**
-  **BDX 2000**
-  **BFX W34**
-  **BDX W34**
-  **X15 BBX**
-  **X16 BBX W34**
-  **SMG**
15°-90°



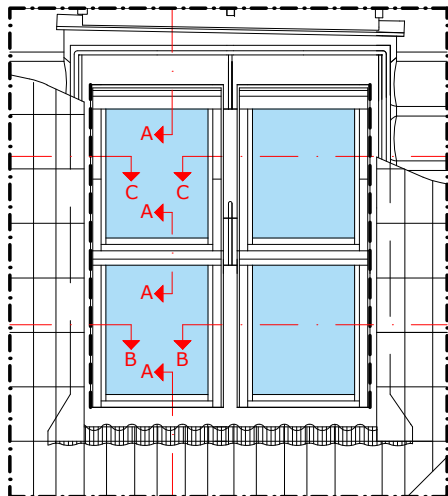


Pogled na krov

Dimenzije prozora, spoljne dimenzije okvira u cm

GPL_60	B x L
MK04	78 x 98
MK06	78 x 118
MK08	78 x 140
MK10	78 x 160
PK06	94 x 118
PK08	94 x 140
PK10	94 x 160
SK06	114 x 118
SK08	114 x 140
SK10	114 x 160
UK04	134 x 98
UK08	134 x 140

GIL_60	B x L
MK34	78 x 92
PK34	94 x 92
SK34	114 x 92
UK34	134 x 92

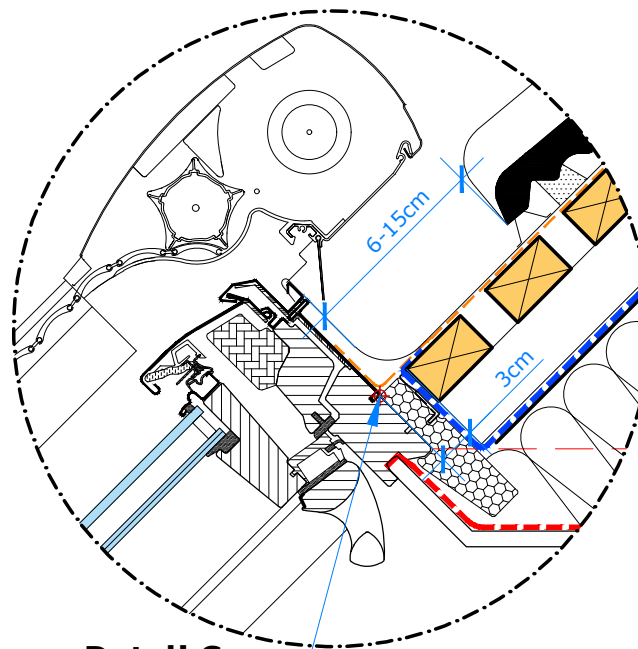

Detalj C M5

Ugradnja prozora s montažnim pločama na letve koje formiraju otvor

Fiksni krovni prozor **VELUX GIL**
(ugradnja samo u kombinaciji sa krovnim prozorom koji se otvara)

Spoljašnja roletna **VELUX SMG**

Aluminijumska opšivka za krovne pokrivače sa visinom profilacije max. 120mm **VELUX EKW**

Hidroizolaciona folija **VELUX BFX**

Letva

Kontra letva

Standardni nivo ugradnje

Fiksiranje parne brane **VELUX BBX** u falc na prozoru

Parna brana **VELUX BBX**



Termoizolacioni okvir **VELUX BDX**

Termoizolacija

Paropropusna vodonepropusna folija

Detalj A M5


2/4

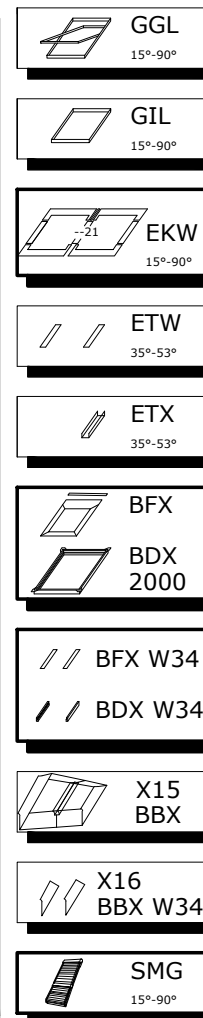

VELUX proizvodi

U cilju sprečavanja oštećenja izazvanih snegom i ledom, zbog zadržavanja vode u gornjem delu prozora (između roletne i krovnog pokrivača), preporuka je poštovanje dobre građevinske prakse i lokalnih vremenskih karakteristika!


VELUX

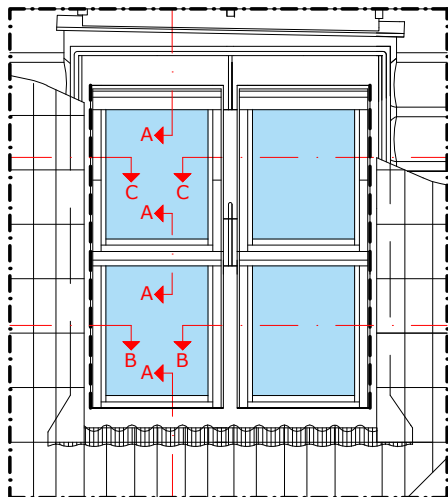


Pogled na krov

Fiksni krovni prozor **VELUX GIL**
(ugradnja samo u kombinaciji
sa krovnim prozorom
koji se otvara)

Spoljašnja roletna
VELUX SMG

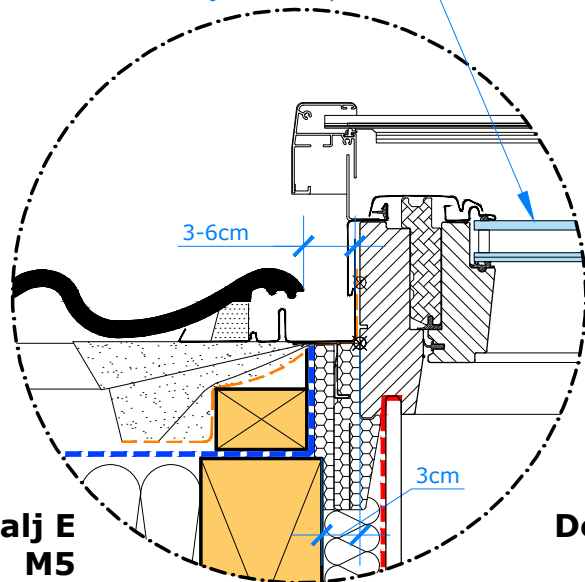

Detalj E
M5

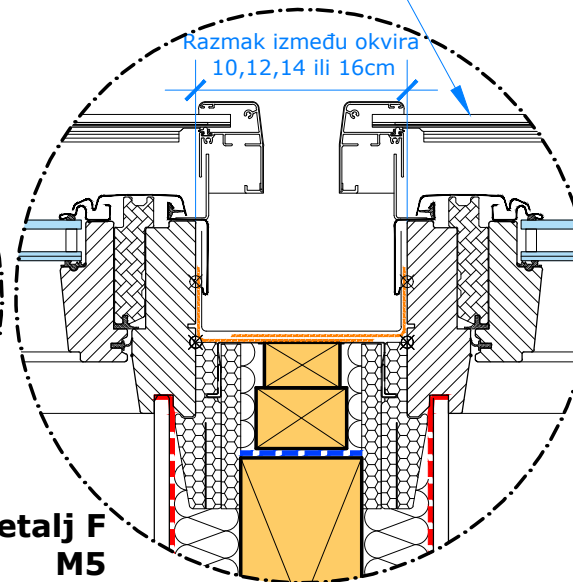


Detalj F
M5

Fiksni krovni prozor
VELUX GIL
(ugradnja samo u
kombinaciji sa krovnim
prozorom koji se otvara)

Bočni element
aluminijumske opšivke
za krovne materijale
sa visinom talasa
max. 120mm
VELUX EKW







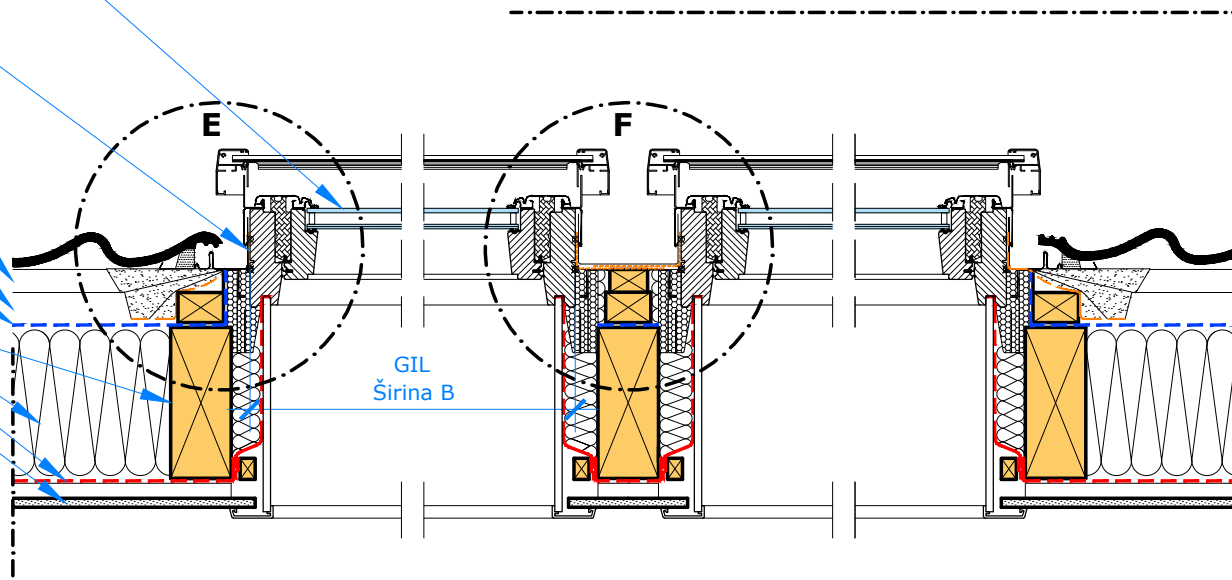





Letva
Kontra letva
Paropropusna
membrana pod krovom
Rog / greda
Termoizolacija
Parna brana
Unutrašnja završna
obloga, gips-karton



Presek B-B / M10


3/4

Crep max.
120mm

-  GGL 15°-90°
-  GIL 15°-90°
-  EKW 15°-90°
-  ETW 35°-53°
-  ETX 35°-53°
-  BFX
-  BDX 2000
-  BFX W34
-  BDX W34
-  X15 BBX
-  X16 BBX W34
-  SMG 15°-90°

VELUX proizvodi


VELUX

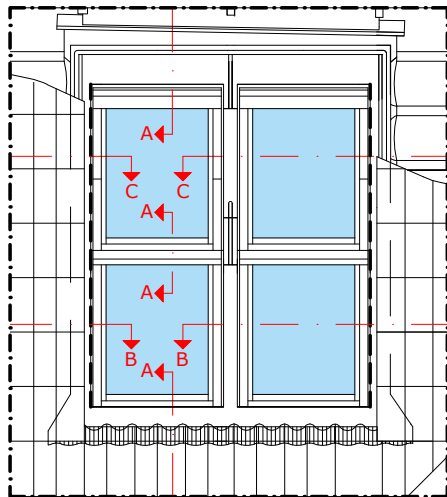


Pogled na krov

Krovni prozor sa središnjim otvaranjem **VELUX GGL**

Spoljašnja roletna **VELUX SMG**

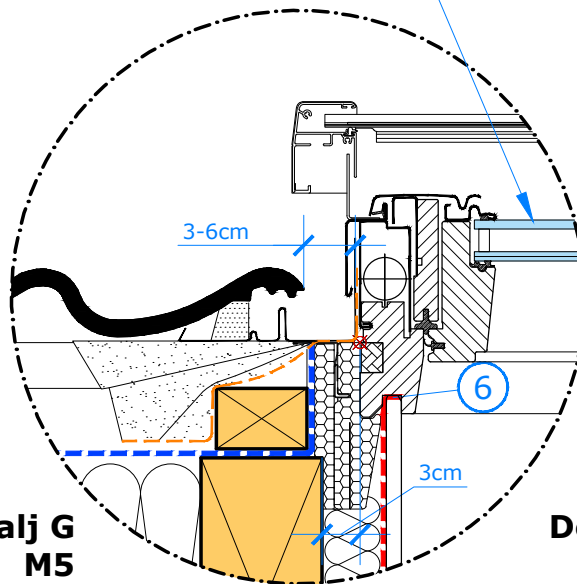

Detalj G
M5

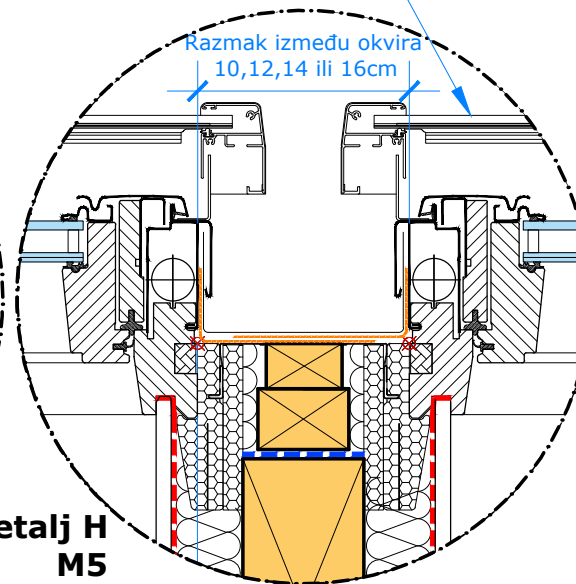

Detalj H
M5

Krovni prozor sa središnjim otvaranjem **VELUX GGL**

Bočni element aluminijumske opšivke za krovne materijale sa visinom talasa max 120mm **VELUX EKW**

Letva

Kontra letva


Paropropusna membrana pod krovom

Rog / gređa

Termoizolacija


Parna brana

Unutrašnja završna obloga, gips-karton

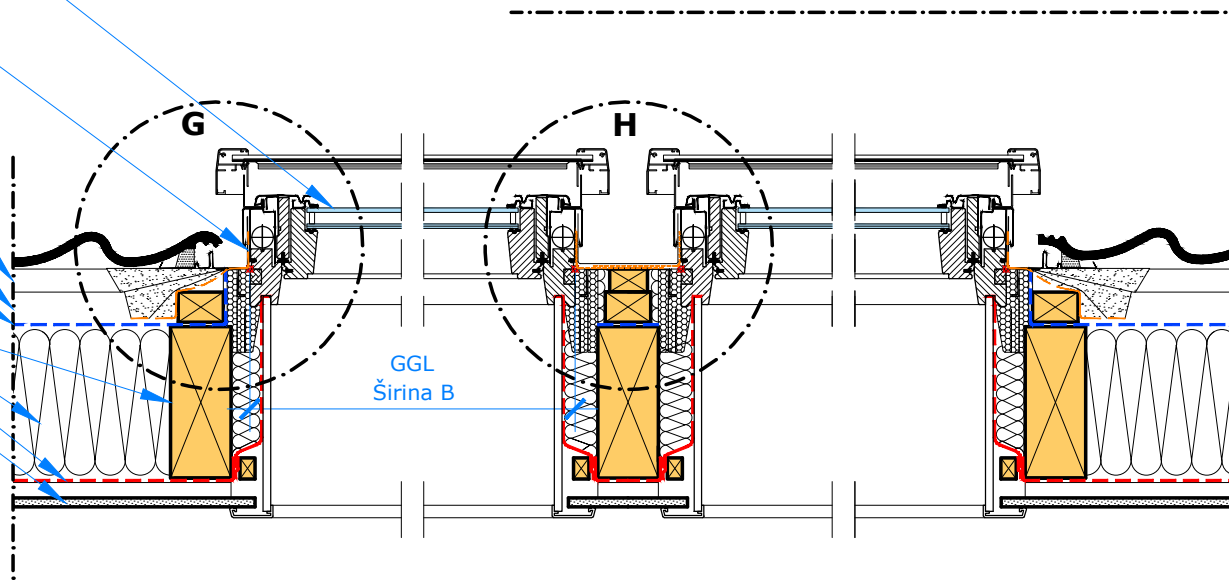

Presek C-C / M10

4/4



	GGL 15°-90°
	GIL 15°-90°
	EKW 15°-90°
	ETW 35°-53°
	ETX 35°-53°
	BFX
	BDX 2000
	BFX W34
	BDX W34
	X15 BBX
	X16 BBX W34
	SMG 15°-90°

VELUX proizvodi

VELUX